



Specialty Packaging Series Streamfeeder ST-1250 Vertical Discharge


Overview

The ST-1250 Vertical Discharge is specially designed to feed and dispense products vertically downward into targets such as boxes, open books, containers, and more. The feature-rich iQuipped Intelligent System Controller provides high performance operation with user-friendly menus. The ST-1250 Vertical Discharge is ideal for use in vertical applications and easily integrates mechanically and electrically for increased system efficiency.

Feed a wide variety of flat card type products into boxes, open books, containers, and more. Operates on-demand one at a time and has batch counting capabilities.

Standard Features

Vacuum fluorescent display with easy to use menus . Long-lasting natural rubber feed belts • One-knob side guide positioning • Patented advancing O-ring separator for product separation • Tool-less vertical discharge adjustment • Miss-detect • Timeout stop • Photo-sensor trigger input • Isolated inputs / outputs for system integration • Trigger delay • Self-triggering feature for stand-alone operation • Stainless steel construction

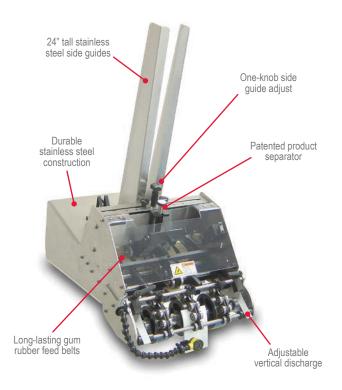

Applications (ask us about your application)

Shrink Wrappers **Box Lines Container Machines** Flow Wrappers Order Fulfillment Food Packaging Lines

Book Lines Carton Machines

Products (ask us about your products)

Coupons Advertisements Invoices **Business Reply Cards** Stickers Inserts Pick Lists Instruction Sheets Labels **Book Markers** and more...

Specifications	
Maximum Product Size	12 W x 14 L in (304 x 355 mm)
Minimum Product Size	2 W x 2.25 L in (51 x 57 mm)
Min/Max Product Thickness	.003125 in (.076 - 3.2 mm)
Belt Speed	5500 in/min (140 m/min)
Batch Size	1-9999
Utilities	Feeder: 115/230vac, 50/60Hz, 3A
Weight	89 lbs. (40 kg)
Warranty	One year limited
Other sizes and thickness capabilities available. Contact us for your application.	

FOOTPRINT DRAWING AVAILABLE AT: www.streamfeeder.com/footprints.html or scan the QR Code

















